

ENERGY



professional treatment solutions
turning your water into benefit



with our quality, we are everywhere there is water



- | | | | |
|-----------------|----------|--------------|----------------------|
| → Asia | → Europe | → Africa | → Middle East |
| Afghanistan | Albania | Algeria | United Arab Emirates |
| Azerbaijan | Bulgaria | Cameroon | Iraq |
| Bangladesh | Cyprus | Djibouti | Iran |
| Georgia | Greece | Egypt | Israel |
| India | Ireland | Ethiopia | Jordan |
| Japan | Latvia | Ghana | Oman |
| Kazakhstan | Malta | Guinea | Palestine |
| Kyrgyzstan | Moldova | Libya | Qatar |
| Myanmar | Romania | Maldives | Syria |
| Nakhichevan | Slovakia | Morocco | Saudi Arabia |
| Nepal | Ukraine | Niger | Yemen |
| Uzbekistan | | Nigeria | |
| Pakistan | | Sierra Leone | |
| Russia | | Sudan | |
| Sakhalin Island | | Tunisia | |
| Tajikistan | | Zambia | |
| Turkmenistan | | | |

Our company, which has been serving in the treatment sector since 1989, has entered into a joint investment with Aquamatch Inc. in 1996 and started designing and producing in Turkey. Since 2003, it has been an engineering and treatment company with 100% Turkish capital.

Our company has become one of the world's leading companies of water and wastewater treatment sector by signing big references and projects in 4 continental and more than 50 countries.

Professional treatment solutions Turning your water into benefit

- 9000 m² indoor production facilities in Aydın
- Installation of mega desalination and wastewater recovery facilities
- Over 20 years of deep knowledge and manufacturing experience in membrane technologies
- Sales and technical services with 16 dealers in 10 different cities
- Installation and operation of turnkey water & wastewater treatment systems at home and abroad
- Engineering, design, manufacturing, sales and after sales services staff of about 300 people together with our dealers





Aksa / Yalova

Capacity:

- 877 m³/h Ultrafiltration System
- 477 m³/h SWRO System
- 437 m³/h 2. Pass RO System
- 134 m³/h Electrodeionization System

→ Filtration Systems

Filtration systems are used to remove physical impurities such as sediment, turbidity, suspended solids, colour, odour and smell.

Filters remove particulates/sediments with various sizes and density by holding them with different media layers inside the tank. Filters are backwashed automatically in order to remove these particulates/sediments from filter bed.

General Features

- FRP / Epoxy Coated Carbon Steel Tanks / Carbon Steel Tanks - Neopren Coated Inside
- 4- 6 Bar Operating Pressure
- Pneumatic Actuated Butterfly Valves
- HDPE / PE / Galvanise Face Piping
- PLC Control Panel
- Electricity 220 V / 50 Hz / 1 pH
- Anthracite, Sand and Graded Gravel Media for Multi Media Filters
- Granular Activated Carbon and Graded Gravel for Activated Carbon Filters
- Standard Products up to 450 m³/h Capacity



Eren Energy / Zonguldak

Capacity:

- 1800 m³/h Ultrafiltration System
- 880 m³/h SWRO System
- 700 m³/h BWRO System
- 200 m³/h MBDI System



Applications

- Pre treatment of process water
- Pre treatment of boiler make up
- Filtration of cooling tower make up
- Filtration of condensate



EnerjiSA / Bandırma

Capacity:

- 120 m³/h Ultrafiltration System
- 60 m³/h SWRO System & Activated Carbon Filter

Essentials for System Design

- Various velocity rates for different feed water quality
- SDI, Turbidity, Total Suspended Solids, Organic Matter, Total Iron and Manganese values in feed water
- Chemical dosing systems according to different water quality

Ultrafiltration Systems Vertical Series

Ultrafiltration (UF) systems are used for filtration of especially sea water, river water, well water and spring water that have dense and variable physical impureness load by membrane technology.

Bacteria, viruses and turbidity in the water can be removed at high rates by hollow fiber membranes with a pore size of 0.02 microns.

UF systems are operated according to the vertical flow principle. The impurities that are held membranes are removed by automatic backwash. Membranes are also periodically chemically enhanced backwash with chemical. Average system recovery is %85-90.



General Features

- Hollow Fiber UF Membranes
- Automatic Backwash & Chemical Washing Unit
- Backwash & CEB Pumps
- PE/PVC Piping
- PLC Control & Operator Panel
- Standart Products up to 220 m³/h capacity

Applications

- Pre treatment of desalination systems
- Fine filtration of river and well water
- Pre treatment of boiler make up
- Filtration of condensate
- Filtration of waste water treatment effluent
- Removal of bacteria and virus



Essentials for System Design

- Various flux rates for different feed water quality
- SDI, Turbidity, Total Suspended Solids, Total Organic Carbon, Total Iron, Manganese and Oil & Gress values in feed water


→ Reverse Osmosis Systems

Reverse Osmosis (RO) systems are used to separate dissolved ions from water with membrane separation in order to get low conductivity fresh water.

Reverse Osmosis systems are crossflow membrane separation units without backwash. Membranes are clened in place with chemicals time to time.

General Features

- TFC Spiral Wound Membranes
- FRP Membrane Housings
- SS 316 Stainless Steel High Pressure Pump
- Low Pressure Piping, PVC or SS 316 Optional
- High Pressure Piping, SS 316
- Cartridge Filter PVC / Stainless Steel Body
- Standart Products up to 108 m³/h Capacity

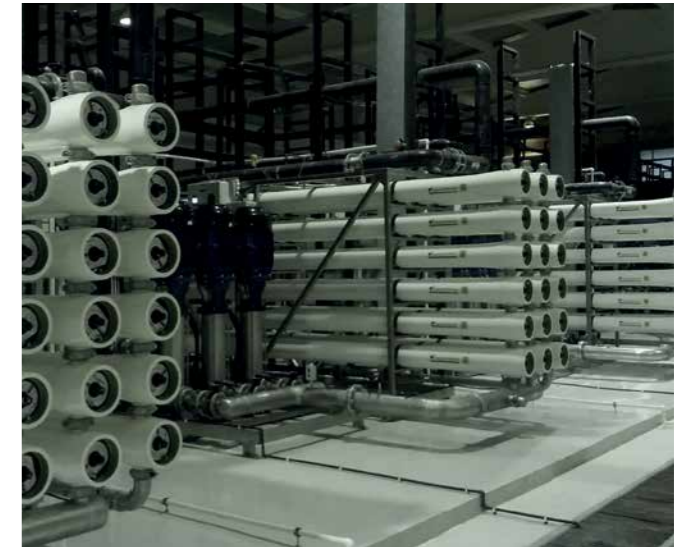

Applications

- Ion removal, mainly Conductivity and Silica
- Boiler make up



Essentials for System Design

- Chemical analysis of feed water, mainly Conductivity, pH, Bicarbonate, Silica, Total Hardness
- Pre treatment system design
- Design for various flux rates
- Membrane ve Antiscalant projections
- Proper chemical usage according to projections

→ Degassifier Systems

Degassifier systems are used to remove CO₂ from water by forced aeration using fan and packing material.

Filling materials inside degassifier tower increase surface of the water in order to achieve better aeration and efficient CO₂ removal.

General Features

- FRP / Epoxy Coated Carbon Steel / SS 316 Stainless Steel Tank and Tower
- Radial Type Fan
- PP Filling Materials
- Standart Products up to 200 m³/h Capacity



→ Membrane Cleaning Units

Reverse Osmosis systems operate continuously. Membranes are cleaned in place to remove contaminants and concentrated salts from membrane surface.

General Features

- SS 316 Stainless Steel Cleaning Pump
- SS 304 Stainless Steel Bag Filter
- PE Cleaning Tank
- SS 304 Stainless Steel Chassis



→ Mixed Bed Demineralization Systems

Mixed Bed Demineralization Systems (MBDI) are used to produce demineralized water from low conductivity pre-treated water.

MBDI Systems are ion exchange resin units designed and operated according to co-current principle. Cation and Anion resins mixed in one tank are exchanging ions by binding them and then regenerated with acid and caustic in order to be reused.



General Features

- FRP / Epoxy Coated Carbon Steel Tanks - Neopren Coated Inside
- SS 316 Stainless Steel Feed & Circulation Pumps
- Pneumatic Actuated Butterfly Valves
- 4 - 6 Bar Operating Pressure
- PVC / PE Piping
- PLC Control Panel
- Blower
- Strong Cationic and Anionic Resins
- Acid & Caustic Regeneration System
- Dilution Pump
- Neutralization System
- Standart Product sup to 100 m³/h Capacity

Applications

- Boiler make up
- Condensate polishing
- Ultra pure & Low silica production

Essentials for System Design

- Pre treatment requirement
- Feed water cationic & anionic load
- Silica and CO₂ values of feed water
- Service run time

→ **Electrodeionization Systems**

Electrodeionization Systems (EDI) are used to produce ultra pure water using the most advanced technology.

EDI Systems contain semi-permeable membrane and resin fillings. Under direct current, ions are moved to cathode "+" and anode "-" poles, so the water is purified.

EDI Systems operate continuously and have neither regeneration nor backwash requirements. EDI reject having lower conductivity than raw water can be returned to RO system inlet.



General Features

- EDI Cells
- Rectifier
- 3-4 Bar Operating Pressure
- PVC/PE Face Piping
- PLC Control Panel & Operator Panel
- Recirculation Pump & Salt Dosage Unit
- Standart Products up to 100 m³/h capacity

Applications

- Ultra pure & Low Silica water production
- Boiler make up



Essentials for System Design

- Feed water that preatred with Double Reverse osmosis systems
- Feed water Hardness, Silica, CO₂, Total Organic Carbon, Total Iron and Manganese values

→ **Bernoulli / Sweden**

Bernoulli filters are self-cleaning filters with a cleaning operation based on the Bernoulli principle, which ensures continuous filtration of water in pressurized systems. The most important part of Bernoulli Filter is the disc mounted on a pneumatic cylinder that is . The Bernoulli filter filtration range is 100-2000 microns.

Usage Ares

- Pre filtration of sea, well and river waters
- UF sytem input
- Cooling tower lines



→ **STF Filtros / Spain**

STF filters are used for filtration in drinking water facilities, seawater treatment plants, agricultural irrigation and physical barrier against to zebra mussels, cogeneration facilities, cooling towers. STF filter filtration range is 10-1000 microns.



→ **Accessories**

Various treatment equipments are used to help main treatment systems lin power plants.



Measurement stations

- In UF, RO, MBDI ve EDI systems
- Measurement of turbidity and Silica



Cartridge & Bag Filters

- Sensitive filtration required



Chemical Dosing Systems

- Pre Filtration, UF, RO systems.

Dealers

ACT İÇ ve DIŞ TİC. LTD. ŞTİ / Dolapdere, İstanbul
melih@aquaproject.com • 0090 212 0 212 237 77 45-48 • 256 87 36

AKAR İLERİ ARITIM TEKNOLOJİSİ İNŞ. SAN. ve TİC. A.Ş. / İzmit
info@akararitim.com • 0090 262 311 78 93-94

AYDIN TEKNİK ARITMA SAN. TİC. LTD. ŞTİ. / Halkalı, İstanbul
aydinteknik@superonline.com • 0090 212 693 56 01 • 693 79 33

BCT İÇ ve DIŞ TİC. LTD. ŞTİ. / Bursa
serap@aquaproject.net • 0090 224 211 50 62-211 46 22 • 211 42 63

DENSER SU ve ATIKSU ARITIM SERVİS İMALAT İNŞ. ve TAAHHÜT A.Ş. / Ankara
info@denseruaritma.com • 0090 312 495 65 33 • 495 65 34

DORUK TEKNOLOJİK SU ve ATIKSU ARITIM SAN. ve TİC. İTH. İHR. LTD. ŞTİ. / Antalya
info@dorukteknolojik.com • 0090 242 317 10 91-92 • 317 10 93

DURU TEKNOLOJİK SU ve ATIKSU ARITIM SAN. ve TİC. İTH. İHR. LTD. ŞTİ. / Adana
info@duruteknolojik.com • 0090 322 234 76 45-46 • 234 76 90

EKONSU TEKNOLOJİK MEMBRAN SİSTEMLERİ A.Ş. / Bodrum
info@ekonsu.com • 0090 252 363 95 80-90-91 • 363 95 07

EKONSU TEKNOLOJİK MEMBRAN SİSTEMLERİ A.Ş. / İzmir
info@ekonsu.com • 0090 232 329 28 88 - 329 22 65 - 329 12 52 • 329 10 04

İŞİK TEKNOLOJİK TESİSAT SİS. TİC. A.Ş. / Ataşehir, İstanbul
isik@isikteknoloji.com • 0090 216 580 93 50-58

MAVİ TEKNOLOJİK MEMBRAN ve ARITMA SİSTEMLERİ A.Ş. / Çorlu
tan@mavias.com • 0090 282 650 24 81-97

NATUREL SU ARITMA TEK. İNŞ. SAN. ve TİC. LTD. ŞTİ. / Ataşehir, İstanbul
info@naturelsu.com • 0090 216 455 71 93 • 455 47 18

NATUREL SU ARITMA TEK. İNŞ. SAN. ve TİC. LTD. ŞTİ. / Ankara
info@naturelsu.com • 0090 312 448 20 17-18 • 448 20 19

ÖZSU TEKNİK SERVİS ve TESİSAT / Ümraniye, İstanbul
zuhtuusta@ozsuteknik.com • 0090 216 631 92 39 • 631 92 27

SİBA İTHALAT ve İHRACAT LTD. ŞTİ. / Kıbrıs
info@sibald.com • 0090 392 822 40 68-69

TEKTES TEKNOLOJİK TESİSAT SİSTEMLERİ SAN. ve TİC. A.Ş. / Ankara
tektes@tektes.com • 0090 312 441 73 81-95



Head Office

İstanbul Dünya Ticaret Merkezi
A2 Blok Kat 15 Ofis No: 445
Yeşilköy, Bakırköy, İstanbul, Türkiye

Tel : 0090 0212 886 31 63
Faks : 0090 0212 886 90 16
e-posta : denizsu@denizsu.com

Factory

Ortaklar Organize Sanayi Bölgesi
Cadde 1000 No: 11
Ortaklar, Germencik, Aydın, Türkiye

Tel : 0090 0256 577 11 33
Faks : 0090 0256 577 11 34
e-posta : fabrika@denizsu.com



Aquamatch Partner in Ukraine



www.aquamatch.com.tr
www.denizsu.com

